

DATA SHEET

DVI - HDCP Extension Cable

M1-1P0

Contents

- ◆ Description
- ◆ Features
- ◆ Absolute Maximum Ratings
- ◆ Recommended Operating Conditions
- ◆ Electrical Power Supply Characteristics
- ◆ Receiver Electrical Interface
- ◆ Specifications of fiber-optic cables (H-PCF)
- ◆ Drawing of transmitter and receiver modules
- ◆ DVI Pin Description
- ◆ Reliability Test of Modules
- ◆ Terminology

Headquarters

Opticis Co., Ltd
501, Byuksan Technopia
434-6 Sangdaewon-Dong, Chungwon-Ku
Sungnam City, Kyungki-Do, 462-120
South Korea
Tel: +82 (31) 737-8033
Fax: +82 (31) 707-8079
Email: sales@opticis.com
www.opticis.com

North American Office

Opticis North America Ltd.
70 East Beaver Creek Road
Unit 30
Richmond Hill, Ontario L4B 3B2
Canada
Tel: +1 (905) 882-7019
Fax: +1 (905) 882-7025
Email: roger@opticis.com

Optical DVI - HDCP Extension Cable

*** Point-to-point optical fibre cable ***

Description

The M1-1P0 DVI / HDMI extension cable is a new member of the Opticis family of products that stretches your digital visual interface connectivity. The M1-1P0 is a hybrid cable solution using four H-PCF (Hard-Polymer Clad Fibre) glass fibers for the Red, Green, Blue and Clock high-speed digital graphic signals and copper wires for the low frequency DDC / HDCP control signals, wrapped in a PVC jacket.

The reality of gigabit high-speed digital graphic interconnections mandates products that maintain front-of-screen video quality. Optical technology extends the ability to transmit digital graphic data beyond the physical limits of copper wires by, i) providing pure signal integrity over long distances for the optimum visual experience, ii) no EMI/RFI transmission or reception, iii) light weight, rugged cabling and connectors, iv) very cost effective per foot/metre, v) low power consumption, and vi) plug and go installation ease – no software requirements.

The product consists of a transmitter and a receiver, which are connected by bundled optical fibre and copper cables. There are male DVI-D connectors at each end. The high-speed graphic data transmission is accomplished by using a VCSEL array inside the transmitter connector, and a Pin-PD array inside the receiver connector.

The shipping group is as follows;

- 1) One H-PCF DVI / HDMI cable: M1-1P0-xxx, where x = length in metres.
- 2) Factory will stock "standard" lengths of 10m, 20m, 30m and 50m.
- 3) User Manual and Quick Installation Guide

Feature Checklist

- ◆ Extends digital graphic signals up to 100m (328ft) with no signal degradation.
- ◆ Supports up to 1600x1200 UXGA resolution at 60Hz refresh rate.
- ◆ Complies with DVI standard (165Mpixels/sec maximum) and supports DDC2B mode.
- ◆ Complies with HDMI standard supporting HDCP parameters.
- ◆ Uses the PC host +5V source from the video card's DVI pin number 14 to drive the Tx and Rx modules, assuming a minimum of 500mA is available from the PC.
- ◆ Optional external AC/DC power version of the cable is available upon request, complete with a universal power adaptor with North American pins.
- ◆ Connectors are compact and light enough to directly plug into the graphic controller card and panel display.
- ◆ Data security inherent with fibre & no RFI/EMI emissions.
- ◆ No software required; just plug and go.
- ◆ User Manual and Quick Installation Guide are available in non-supplier specific format for "white box" sales.

Applications

- ◆ Digital TFT-LCD FPDs, PDPs and projectors for medical imaging, air traffic control, factory automation, conference rooms, auditorium A/V systems, etc.
- ◆ Kiosks with digital FPDs showing full motion graphic displays from remote systems
- ◆ PDP displays for information display in public sites.
- ◆ LED signboards in streets and stadiums.
- ◆ Home Theatre applications

Options

- ◆ M1-1P0E optionally available upon special order from the factory with an external +5V power supply where the video card is unable to provide a minimum of +5V, 500mA on pin 14.
- ◆ Custom lengths up to 100m are also available from the factory.

Absolute Maximum Ratings

Parameter	Symbol	Minimum	Maximum	Units
Storage Temperature	T_{stg}	- 30	+ 70	°C
Supply Voltage	V_{CC}	- 0.3	+ 6.0	V
Transmitter Differential Input Voltage	V_d	-	1	V
Relative Humidity	RH	0	85	%
Lead Soldering Temperature & Time	-	-	-	260°C, 10 sec

Recommended Operating Conditions

Parameter	Symbol	Minimum	Typical	Maximum	Units
Ambient Operating Temperature	T_A	0		+ 50	°C
Data Output Load	R_{LD}		50		Ω
Power Supply Rejection (Note1)	PSR		50		mV _{p-p}
Supply Voltage	V_{CC}	+ 4.5	+ 5.0	+ 5.5	V
Graphic Supply Voltage (Note2)	GV_{CC}	+ 3.0	+ 3.3	+ 3.6	V

Note1. Tested with a 50mV_{p-p} sinusoidal signal in the frequency range from 500 Hz to 500 MHz on the V_{CC} supply with the recommended power supply filter in place. Typically less than a 0.25 dB change in sensitivity is experienced.

Note2. Graphic Supply Voltage is only for the Graphic Signal Interface which is generated by regulator in the Transmitter and Receiver

Electrical Power Supply Characteristics

- For M1-1P0, where +5Volt PC power is derived from pin 14 of the DVI-D connector: The power supply fully specified by the DDWG DVI spec has to have a capability more than 500mA.
- For M1-1P0E with the external power adaptor, the characteristics are as follows;


Parameter	Symbol	Minimum	Typical	Maximum	Units	
Supply Voltage	V_{CC}	4.5	5	5.5	V	
Supply Current	TX	I_{TCC}	-	170	200	mA
	RX	I_{RCC}	-	130	150	mA
Power Dissipation	TX	P_{TX}	-	0.85	1.1	W
	RX	P_{RX}	-	0.65	0.825	W

Specifications of Fibre-Optic Cables (H-PCF)

Parameter	Value	Parameter	Value
Core Diameter	200um	Cladding Diameter	225um
Buffer Diameter	0.5mm	Outside Diameter	7.6mm
Proof Test Level	0.53GPa		

Drawing of transmitter and receiver modules

Dimension [mm]

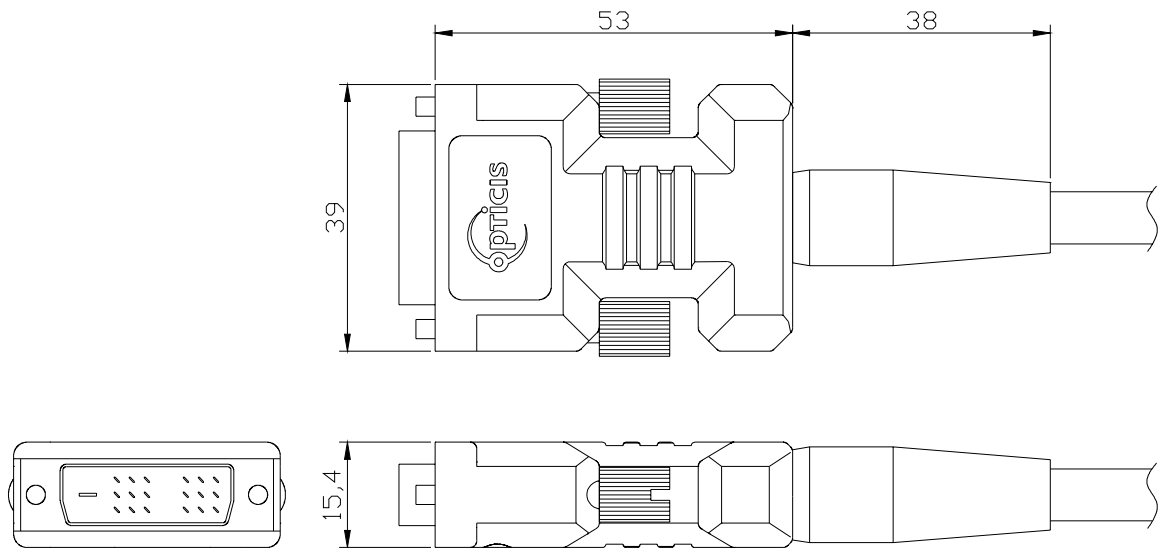

DVI Pin Description

Pin	Symbol	Functional Description
1	CH2-	TMDS Data Signal Channel 2 Negative
2	CH2+	TMDS Data Signal Channel 2 Positive
3	GND	TMDS Data Signal Channel 2 Shield
4		
5		
6	DDC Clock	DDC Clock line for DDC2B communication
7	DDC Data	DDC Data line for DDC2B communication
8	N.C.	
9	CH1-	TMDS Data Signal Channel 1 Negative
10	CH1+	TMDS Data Signal Channel 1 Positive
11	GND	TMDS Data Signal Channel 1 Shield
12		
13		
14	5 V	5 V Input for Transmitter from Host 5 V Output for Monitor from Receiver
15	GND	Ground
16	Hot plug Detect	Signal is driven by monitor to enable the system to identify the presence of a monitor
17	CH0-	TMDS Data Signal Channel 0 Negative
18	CH0+	TMDS Data Signal Channel 0 Positive
19	GND	TMDS Data Signal Channel 0 Shield
20		
21		
22	GND	TMDS Clock Signal Shield
23	CLK+	TMDS Clock Channel Positive
24	CLK-	TMDS Clock Channel Negative

Note: Channels 3, 4 and 5 dual-link data signal pins are not used

Reliability Test

Opticis utilizes three types of test criteria for a reduction of variability and a continuous improvement of the process by its FEMA (Failure Mode and Effective Analysis) program.

- 1) Mechanical test (vibration, shock)
- 2) Temperature & humidity tests
- 3) EMC test (*FCC class A and CE Verification*)

Mechanical and Temperature & Humidity Test Data

Heading	Test	Conditions	Duration	Sample Size	Failure	Remarks
Operating Test	Operating at each Temperature (See Note)	* - 0 ~ 50 °C (Interval: 10 °C)	30 Min (Each Temperature)	n =4	0	Note: Visual Test on the Display
Storage Test	Low Temperature	* T _s = -30 °C	96 HR	n=2	0	1. TS: Storage Temperature
	High Temperature	* T _s = 70 °C	96 HR	n=2	0	2. RH: Relative Humidity
	High Humidity High Temperature	* T _s : 85 °C * RH: 85%	96 HR	n=2	0	
Mechanical Test	Mechanical Shock	* Pulse: 11 ms * Peak level: 30 g * Shock pulse: 3 times/Axis	-	n=2	0	
	Mechanical Vibration	* Peak acceleration: 20 g * Frequency: 20~2000 Hz * Sweep time: 30 Minutes * 4 Times/Axis	-	n=2	0	

EMC Test Data

1) EMI: Meet FCC class A (ICES-003) and CE class A

STANDARDS		CONDITIONS
EN 55 022 (CISPR22) FCC; PART 15 SUBPART B	CE (Conducted Emission) & RE (Radiated Emission)	Meet Class A
EN 61000-3-2 (IEC 61000-3-2)	Harmonics	Meet Class A
EN 61000-3-3 (IEC 61000-3-3)	Flickers	Meet Class A

2) EMS: Meet CE standards (EN 55024) and CISPR24 equivalents

STANDARDS		CONDITIONS
EN 61 000-4-2:1995	Electrostatic Discharge Immunity (Air: 8kv, Contact: 4kv)	Meet Criterion B
EN 61 000-4-3:1996	Radiated RF E-Field (80~1000 MHz) 3V/m (AM 80%, 1kHz)	Meet Criterion A
EN 61 000-4-4:1995	Fast Transients (5kHz, 60Seconds)	Meet Criterion B
EN 61 000-4-5:1995	Surge Transients	Meet Criterion B
EN 61 000-4-6:1996	Conducted Susceptibility (CS) Radiated Susceptibility (RS)	Meet Criterion A
EN 61 000-4-11:1994	Voltage Dips, Interruption & Variation	Meet Criterion C

Terminology

DDC	Digital Display Channel. Latest specification is DDC2B.
DVI-D	Digital Visual Interface. Digital connection only – no analog.
EDID	Extended Display Identification Data. EDID parameters are sent over the DDC link.
EMI	Electro Magnetic Interference.
EMS	Electro Magnetic Susceptibility.
HDCP	High Definition Content Protection. These parameters are part of the 2002 High Definition Multimedia Interface (HDMI) specification for Consumer Electronics.
PDP	Plasma Display Panel. Large HDTV panels up to 63" use this display technology.
RFI	Radio Frequency Interference.
TFT-LCD	Thin Film Transistor Liquid Crystal Display – the technology of most computer display panels with VESA resolutions up to 1600x1200 pixels.
TMDS	Transmission Minimized Differential Signalling is the Silicon Image Inc. protocol for the digital signals.
VCSEL	Vertical Cavity Surface Emitting Laser transmitter diode. The receiver diode is the PIN-Photo Diode. These components are designed and manufactured by Opticis.
VESA	Video Electronics Standards Association.