



ORiNOCO AP-700

For Mobile Enterprise Applications



APPLICATIONS

- **Small and medium corporations**
Mobile access to improve employee, contractor and customer efficiency
- **Universities**
Flexible, immediate, mobile faculty and student connectivity in dorms, classrooms, libraries and campus quads
- **Hospitals and medical clinics**
Real time information system wide for better patient care and reduced errors
- **Local, state and federal agencies**
Fast access to information to serve constituencies better
- **Public hotspots**
Robust, secure, Wi-Fi connectivity for airports, convention centers, hotels

Next-Generation Access Point Brings QoS and Performance to Mid-Size Enterprises

The ORiNOCO AP-700 balances enterprise-scale security, management and Quality of Service features with a moderate price point – and either 802.11a or 802.11b/g mode operation. The new, high-performance AP-700 is the entry-level solution in Proxim’s next-generation line of access points supporting enterprise voice and video applications. The AP-700 is perfect for mid-size production Wi-Fi networks.

- Industry-leading performance with new Super Mode
- New level of intelligent rogue access point and client detection
- Sophisticated hotspot interfaces with Radius integration
- Pre-standard IEEE 802.11e quality of service support for latency-sensitive applications
- Plenum rating and other important safety features

Proactive Security Measures to Protect Your Network

ORiNOCO access points support the latest security standards, including IEEE 802.11i and AES encryption, and add proactive security measures.

- IEEE 802.1X mutual authentication
- Dynamic per-user, per-session rotating keys
- Rogue access point detection, notification
- Secure management interfaces: SNMPv3, SSL and SSH
- Intra-cell blocking to prevent client-to-client snooping

Easy to Deploy and Manage


Ease of deployment and integration with the wired network are critical factors in a successful, profitable wireless LAN rollout. ORiNOCO access points excel with key capabilities that simplify WLAN deployment.

- Tools to speed installation and optimization: automatic channel selection, adjustable transmit power, external antenna connectors
- Wireless repeating functionality in areas without Ethernet wiring
- Remote management via SNMP, HTTP and Telnet
- Extensive RADIUS accounting support
- Powerful group configuration, software updates and automatic alerts via Proxim Wavelink Mobile Manager

Reliable by Design

With over 10 years of experience in the design and manufacture of wireless LANs, Proxim understands that service providers and enterprises require the same uptime and reliability in a wireless network as in a wired network. ORiNOCO access points offer:

- Robust features for enterprise, public access – compared to consumer grade APs
- Automatic reconfiguration of security policy in the event of power loss
- Dual firmware image support – for rollback in the event of software or config change problems
- IEEE 802.3af Power-over-Ethernet, plenum rating, built-in Kensington lock and external antenna connectors*

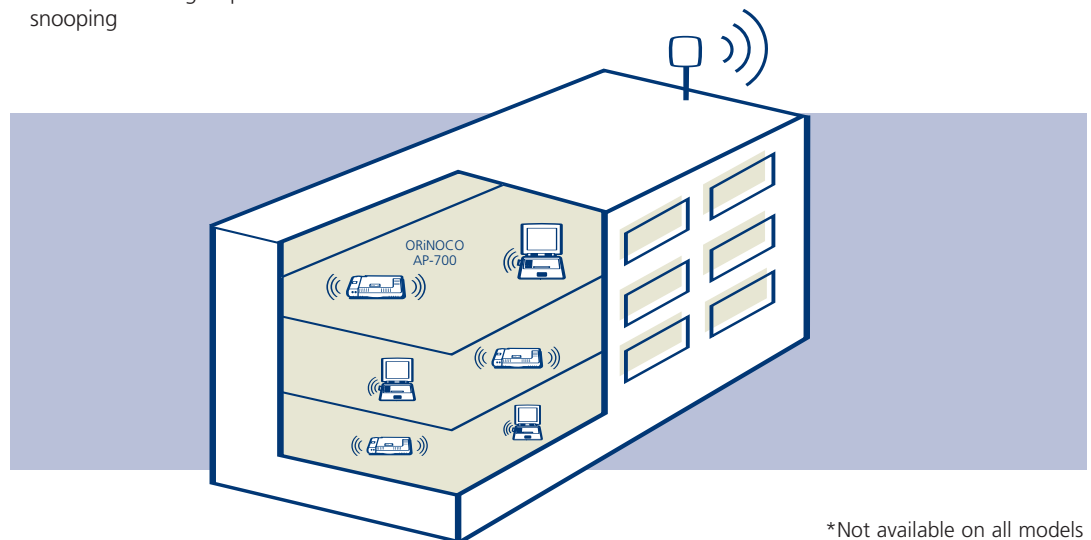

*Not available on all models

About Proxim Wireless

Proxim Wireless is a global leader in networking equipment for Wi-Fi and broadband wireless networks. Proxim provides solutions for enterprise applications, last mile access, municipal broadband networks, and cellular backhaul. Product families include ORiNOCO and TeraStar Wi-Fi products; Tsunami, TeraBridge, Gigalink, and TeraOptic Ethernet bridges, and Lynx point-to-point digital radios.



Proxim Wireless Corporation
2115 O'Nel Drive
San Jose, CA 95131

tel: 800.229.1630
tel: 408.731.2700
fax: 408.731.3675

www.proxim.com



ORiNOCO AP-700 Specifications

ADDITIONAL FEATURES

802.11b, 802.11g and 802.11a support	User-selectable 802.11b/g or 802.11a operation
Field upgradeable	Software upgradeable to support new standards
IEEE 802.11i and AES	Highest authentication and encryption methods including mutual authentication, message integrity check (MIC), per-packet keys initialization vector hashing and broadcast key rotation
Rogue AP and Client Detection	Detects, alerts and stops unauthorized rogue Access Points and clients in both the 2.4 and GHz bands ¹
Secure Management Interfaces	SNMPv3, SSL and SSH protect against unauthorized AP changes via the management interface
Multiple VLAN Support with different security settings	Up to 16 separate VLANs each able to support a different security setting
Auto configuration via DHCP	Ensures new APs automatically receive correct configuration and prevents security vulnerabilities with deliberate resets
Central management and configuration	Allows centralized management of AP settings including group updates of firmware ¹
Assured Software Upgrades	Guarantees new AP configuration file is valid before deleting current image - dual image support
Quality of Service	Draft IEEE 802.11e along with 802.1p and 802.1q improves performance of video and voice applications
High Output Power	+20 dBm for 802.11b, +18 dBm for 802.11g and 802.11a
Transmit Power Control	Supports settable transmit power levels to adjust coverage cell size
Automatic Channel Selection	Simplifies installation by choosing best possible channel upon installation
Super Mode	Delivers greater than 30 Mbps throughput for ORiNOCO and Atheros-based clients while simultaneously compatible with non-Atheros clients
Designed for Public Hot Spots	Extensive RADIUS Accounting support, intra-cell blocking to prevent client-to-client snooping, multiple VLAN support with different security modes
Advanced Filtering Capabilities	IEEE 802.1d bridging with static MAC address filtering, network protocol filtering, Proxy ARP, multicast/broadcast storm threshold filtering, TCP/UDP port filtering, intra-cell traffic filtering, and Spanning Tree support
802.3af and AC power	Decreases installation costs up to \$1000 per AP when Power over Ethernet is available
Integrated diversity 2.4 and 5 GHz antennas with horizontal and vertical polarization	Delivers optimum coverage in any mounting position and excellent performance in high multipath environments
External antenna connectors for 802.11b/g and 802.11a	Allows use of shaped and higher gain antennas to design for most efficient AP placement ²
Plenum rated	Meets safety and insurance requirements when installed in air spaces
Wi-Fi Certified	Industry certification guarantees interoperability with other Wi-Fi certified clients

INTERFACE

Wired Ethernet	10/100 base-T Ethernet (RJ-45)
Wireless Ethernet	1 integrated 802.11a/b/g radio
RS-232	Unit configuration

HARDWARE SPECIFICATION

Memory	32 MB SDRAM; 8 MB Flash
--------	-------------------------

PHYSICAL SPECIFICATIONS

Dimensions	7.1 x 4.8 x 1.1 in (180 x 120 x 27 cm)
Weight	0.65 lbs (0.295 kg)

ENVIRONMENTAL SPECIFICATIONS

Temperature	Operating	0°C to 55°C
	Storage	-10°C to 70°C
Humidity	Operating	95% (non-condensing)
	Storage	95% (non-condensing)

POWER SUPPLY

Types	Integrated module Autosensing 100/240 VAC; 50/60 Hz IEEE 802.3af Active Ethernet for power over Ethernet
-------	--

LEDS

Type	Power, Ethernet LAN Activity Wireless 802.11a/b/g Activity
------	---

MANAGEMENT

- SNMPv1, SNMPv2c and secure SNMPv3 management
- Standard & ORiNOCO traps
- ORiNOCO MIB, Etherlike MIB, 802.11 MIB, Bridge MIB, MIB-II
- TFTP support
- Telnet CLI, Serial Port CLI (no proxy required)
- HTTPS (SSL) server for secure web-based management
- Proxim WaveLink Mobile Manager for group management (not included)
- Syslog
- DHCP Server and Client

WARRANTY

1 year (on parts and labor)

PACKAGE CONTENTS

- AP-700 access point with built-in 802.11a/b/g radio
- Power supply and support for Active Ethernet and IEEE 802.3af
- Software and documentation
- Cable cover and mounting bracket

RELATED PRODUCTS

Proxim Wavelink Mobile Manager, Proxim Ekahau Site Survey and RF Prediction Software, ORiNOCO 11a/b/g ComboCard, Dual Band Range Extender Antenna

¹ In conjunction with Proxim Wavelink Mobile Manager

² 8675-AU, 8675-EU2 and 8675-US2 does not include external antenna connectors

For detailed technical specifications, please go to <http://www.proxim.com/products/wifi/ap/ap700/techspecs.html>

Wi-Fi is a trademark of the Wireless Ethernet Compatibility Alliance, Inc. Windows and Windows Me are registered trademarks of Microsoft Corporation. DAT is a trademark of Nomadix.

©2004 Proxim Wireless Corporation. All rights reserved. Proxim and ORiNOCO are registered trademarks and the Proxim logo is a trademark of Proxim Wireless Corporation. All other trademarks mentioned herein are property of their respective owners. Specifications are subject to change without notice.